




## Ecoline TwoDIMOUT

Item number 43728, KMAT 61000418



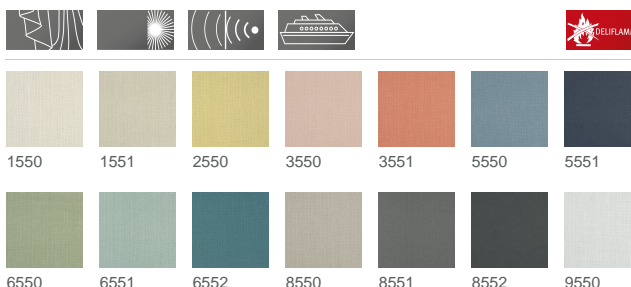






### Product description

EcoLine stands for functional, permanently flame-retardant fabrics with a reduced ecological footprint. They are made from yarns from recycled PET bottles, among other things. Sustainability, functionality and high-quality design come together here in one product line. EcoLine Two is a dimout that can darken the room by up to 99%. A coarse, linen-like surface surprises with a soft feel. The natural character that this functional dimout has to offer is particularly noteworthy. Good acoustic values (class B) ensure a pleasant room atmosphere. Ecoline Two is available as a floor-to-ceiling product. The color palette is Scandinavian in character. Soft, powdery tones are paired with deep shades: delicate warm rose, coral, sorbet yellow and deep dark blue. Six neutral tones round off the color palette of 14 colors in total.

### Technical Details

<b>Fabric width</b>	approx. 297 cm
<b>Weight je m²</b>	approx. 400 g/m²
<b>Composition</b>	72% Polyester FR, 28% Polyester FR recycelt
<b>Flame retardancy</b>	IMO 2010 FTP Code Part 7, M 1, C 1, BS 5867 Typ B, EN 13773, DIN 4102 / B1, DIN 4102 / B2, NFPA 701 Flammability performance is dependant on the foam used.
<b>Light fastness</b>	note 6
<b>Wash fastness 40°C DIN EN ISO 105-C06</b>	note 4-5
<b>Wash fastness 60°C DIN EN ISO 6330 DIN EN ISO 5077</b>	note 4-5

Dimensional change Washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1%
Dimensional change Washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-2%
Dimensional change Washing 72°C DIN EN ISO 6330 DIN EN ISO 5077	
Rubbing fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.85
Sound absorption	Class B
Care labelling	<div>        </div>
State	2024-03-08